


AVA Tech Center Article
Removing Voyager XII Radio
Main Article By Dave Krueger– Additional photos and notes By Gary Schill

1. Remove windshield, lowers (where engine heat is vented out), headlight, and fairing.
2. Remove speaker covers by loosening hex head bolts (4). *The bolts screw into “C” shaped fasteners and may fall when two of the bolts are removed, so be sure you already have the fairing removed so you can hold these when bolts are loosened, and not have them drop somewhere you have a hard time recovering them.*
3. Remove speakers by removing 4 screws. Two of the screws screw into the “C” shaped fasteners, the other two into clip nuts.



4. Disconnect all wires to the radio and instrument cluster.
5. Remove the two nuts holding the dash on as shown by the red arrows below.

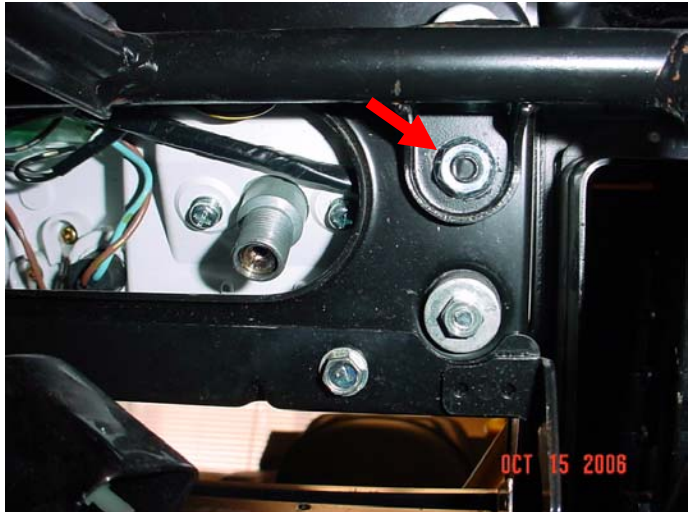

6. Carefully remove dash with radio and instrument cover.

Continue with page 2


Removing Voyager XII Radio

Main Article By Dave Krueger– Additional photos and notes By Gary Schill

Page 2



Remove radio bezel around front of radio by using the cutout on either side of the bezel to grasp the bezel (shown by red arrow). There are plastic tabs on either side and top and bottom of the bezel to hold it onto the radio. Although these tabs are missing in this photo, they need to be released from their rectangular hole or depression in the radio to remove them.

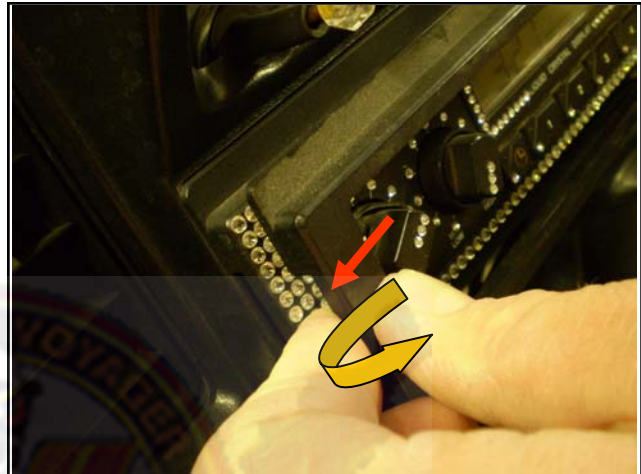

In the picture above, the red arrow again shows the same cutout as in the photo to the left. Start on one of the ends by using your fingers to grasp this cutout, then try to gently and just a little, rotate the end of the bezel to unhook the plastic latch that hooks to the radio case (gold arrow). After you get one side unhooked, raise that end away from the radio slightly, then unhook the two center latches by squeezing the center of the bezel in towards the center slightly. The bezel should then come away further from the radio until the other end comes loose.



Now remove the four screws (two top, two bottom) from the front of the radio (two bottom screws shown by red arrows in photo above). Also, you will need to remove the four small screws (two each side) that attach the radio to the little rubber mount brackets towards the back but on the side of the radio. Then, slide the radio out.

Re-install the new or repaired radio back into the bike by reversing the order of disassembly.

NOTE: In the picture to the left and directly above this text, a second radio bezel is being used for display purposes only, the actual remains installed. After the removal of the bezel, you will see the area where the bezel would normally hide.

